

[illegible]

Figure 1 is a cross-sectional view of a mechanical assembly 16. The assembly includes a base 16a with a central cavity. Inside the cavity, there is a piston 17 and a spring 18. A top plate 20 is positioned above the cavity, with a pin 21 and a vertical rod 22 passing through it. A double-headed arrow indicates vertical movement.

FIG.4

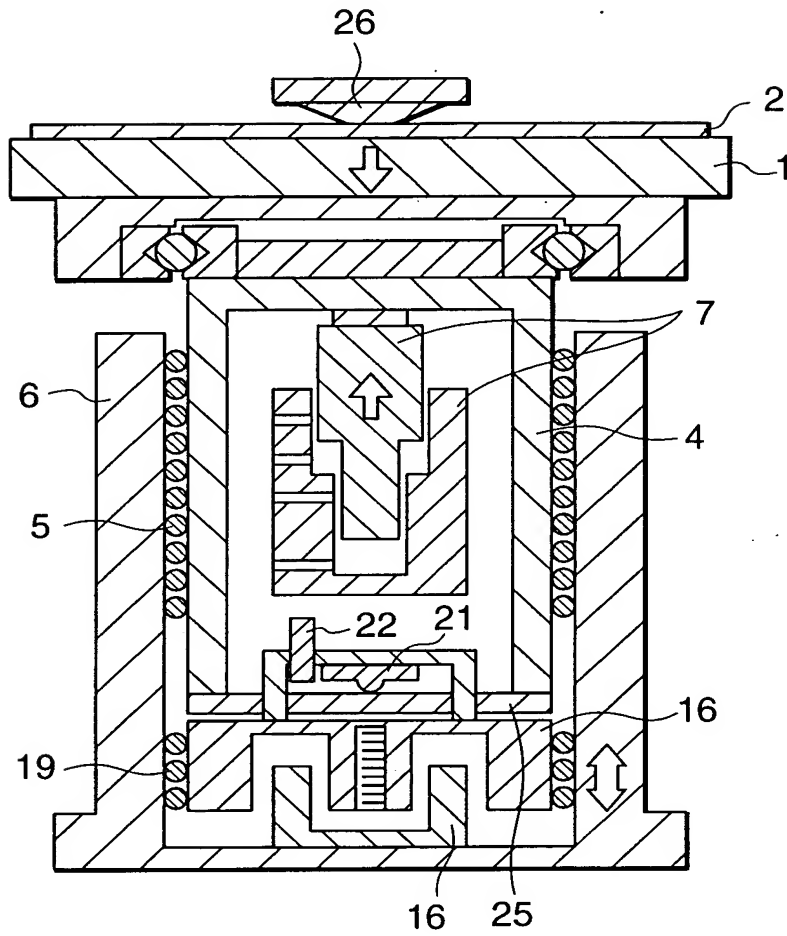


FIG.5

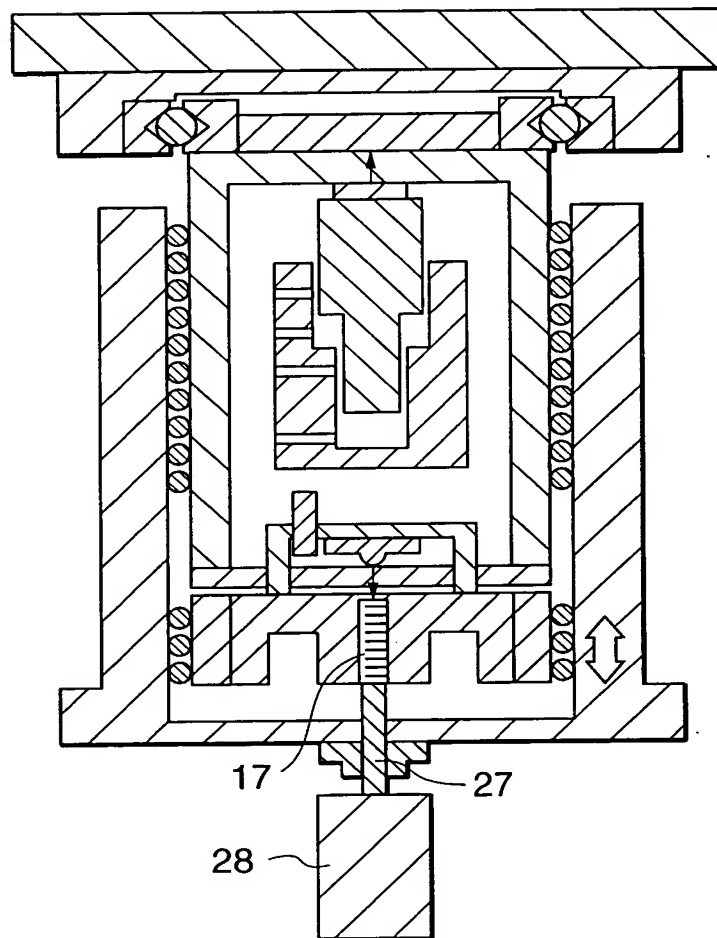


FIG.6

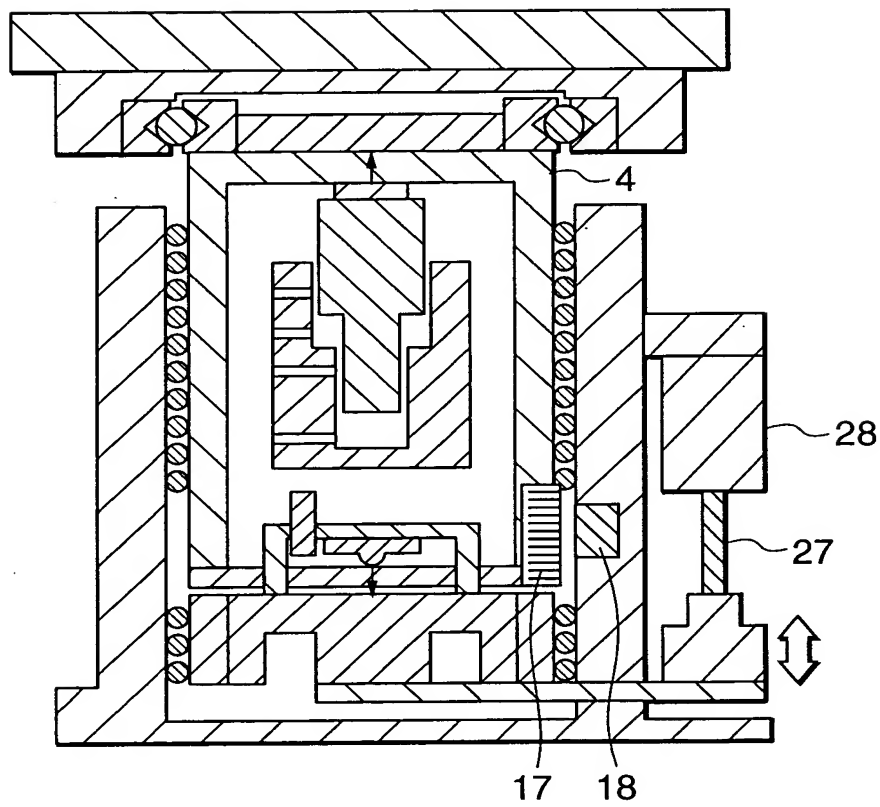
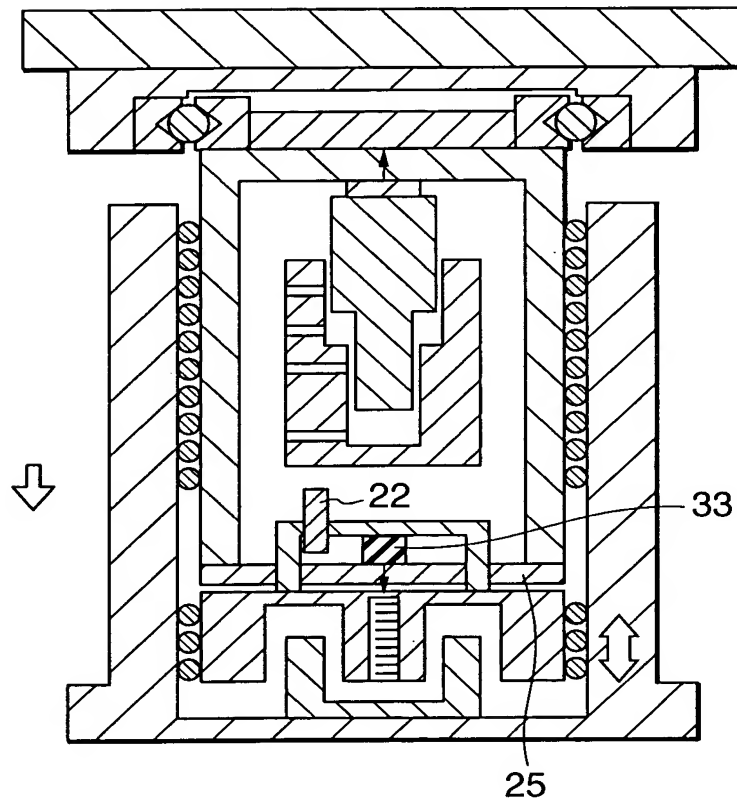


FIG.7



**FIG.8**

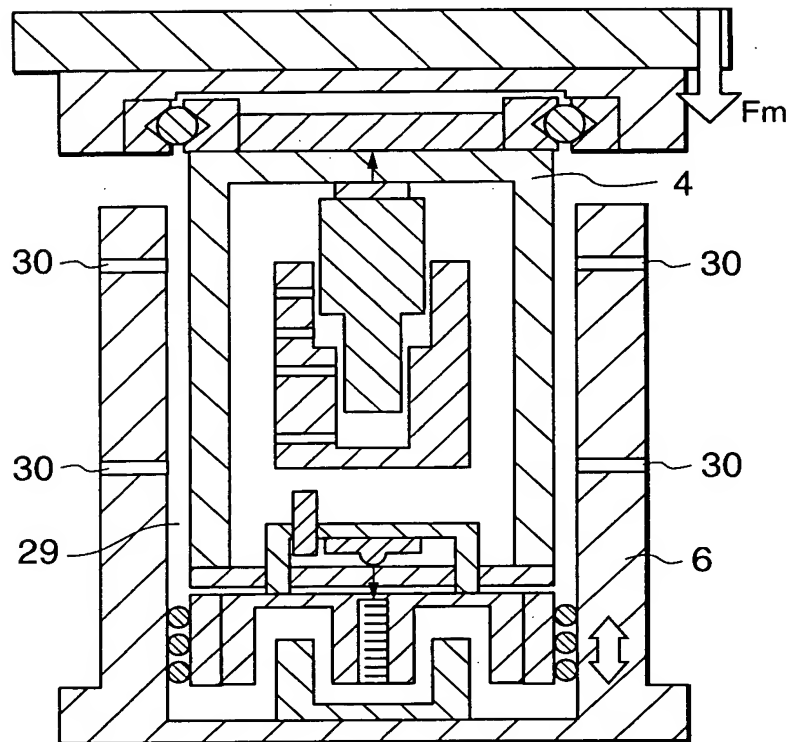


FIG.9


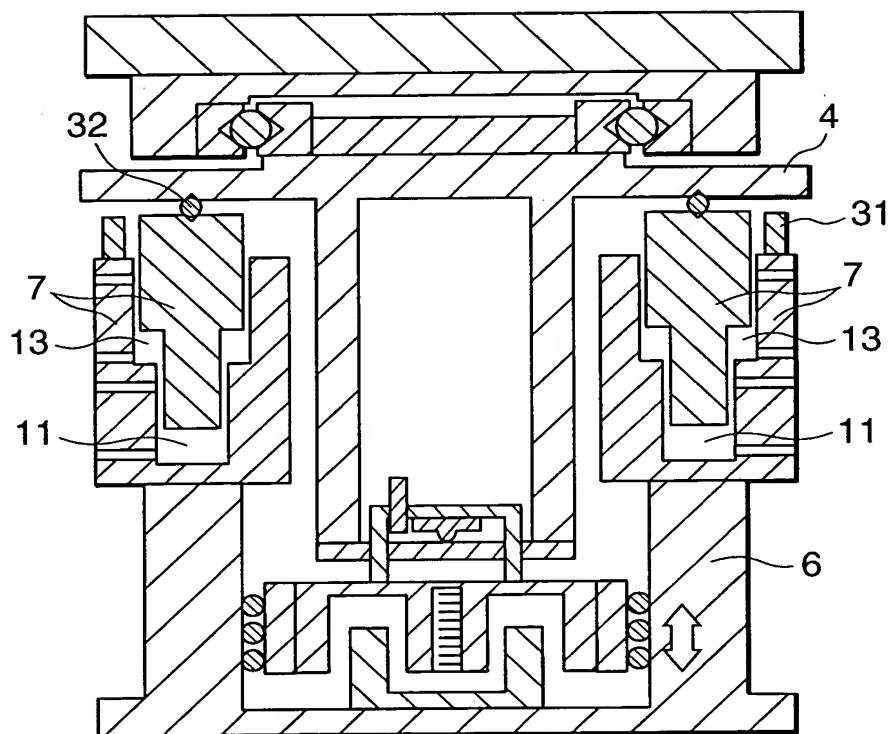




FIG.10

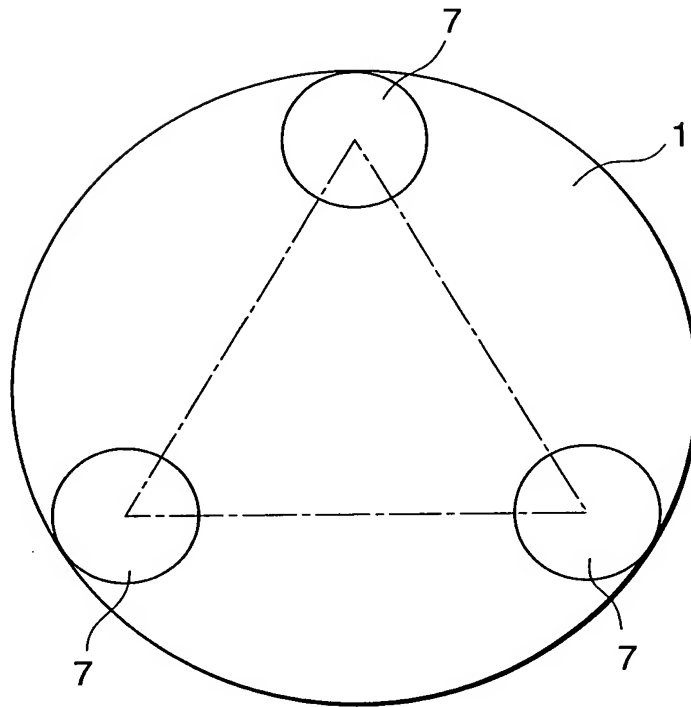

1 : ADSORPTION STAGE  
7 : PRESSING MEMBER